

HBC 313

Specifications:

Motor: Single-Phase 100-115V / 220-230V
50/60Hz 580W (Double Insulation)

Cutting Speed: 1.5 seconds

Max. Cutting Capacity: 490N/mm² (50kgf/mm²) Max. D13
620N/mm² (63kgf/mm²) Max. D10
Use "SP blade" for longer cutting life

Weight: 5.3kg

Dimensions: 362mm (L) x 205mm (W) x 106.5mm (H)

Standard Accessories: Plastic carrying case , Hydraulic oil #46,
Hex wrenches (3. 4. 5.),
Spanner (14 x 17mm),



HBC 316

Specifications:

Motor: Single-Phase 100-115V / 220-230V
50/60Hz 580W (Double Insulation)

Cutting Speed: 2.5 seconds

Max. Cutting Capacity: 490N/mm² (50kgf/mm²) Max. D16
620N/mm² (63kgf/mm²) Max. D13
Use "SP blade" for longer cutting life

Weight: 5.8kg

Dimensions: 378mm (L) x 205mm (W) x 108mm (H)

Standard Accessories: Plastic carrying case, Hydraulic oil #46,
Hex wrenches (3. 4. 5.),
Spanner (14 x 17mm),



HBC 225

Specifications:

Motor: Single-Phase 100-115V / 220-230V
50/60Hz 1430W (Double Insulation)


Cutting Speed: 3.5 seconds


Max. Cutting Capacity: 490N/mm² (50kgf/mm²) Max. D25
560N/mm² (57kgf/mm²) Max. D25
620N/mm² (63kgf/mm²) Max. D25
Use "SP blade" for longer cutting life

Weight: 22.0kg

Dimensions: 480mm (L) x 138mm (W) x 270mm (H)

Standard Accessories: Carrying case, Hydraulic oil #32,
Hex Wrenches (4.5.6.8mm)
Spanner (14 x 17mm & 24mm)

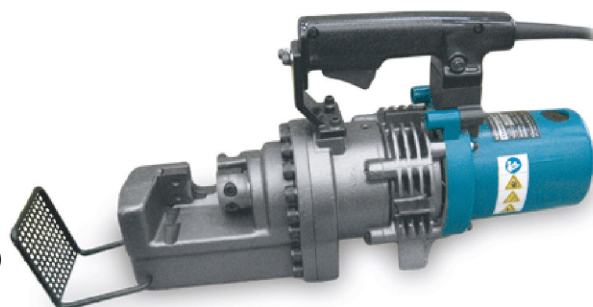

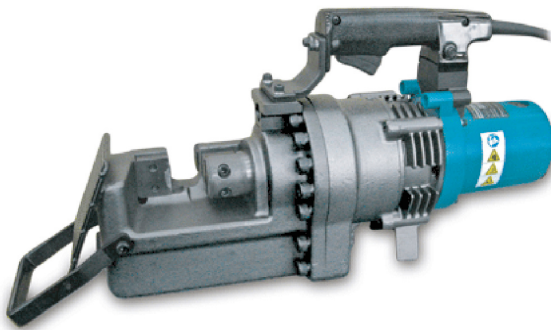

HBC 232

Specifications:

Motor: Single-Phase 100-115V / 220-230V
50/60Hz 1430W (Double Insulation)

Cutting Speed: 7.0 seconds

Max. Cutting Capacity: 490N/mm² (50kgf/mm²) Max. D32
560N/mm² (57kgf/mm²) Max. D32
620N/mm² (63kgf/mm²) Max. D32
Use "SP blade" for longer cutting life

Weight: 37.6kg

Dimensions: 543mm (L) x 167.5mm (W) x 289mm (H)

Standard Accessories: Carrying case, Hydraulic oil #32,
Hex Wrenches (4.5.6.8.10mm)
Spanner (17mm.30mm)



HBB 32

Specifications:

Motor: Single-Phase 100-115V / 220-230V
50/60Hz 700W

Bending Speed: 90 degrees bend
D32: 14.5 seconds (pull bending)
D32: 15.5 seconds (push bending)

Max. Bending Capacity: 490N/mm² (50kgf/mm²) Max. D32

Weight: 19.0kg

Dimensions: 590mm (L) x 290mm (W) x 210mm (H)

Standard Accessories: Wooden Box, Hydraulic oil #46,
Hex wrenches (3. 4. 5. 6. 8),
Spanner (14 x 17mm & 24mm),
Roller



HBB 32 HPW

Specifications:

Motor: Single-Phase 100-115V / 220-230V
50/60Hz 1330W (Double Insulation)

Bending Speed: 90 degrees bend
D32: 15.0 seconds D13: 11.0 seconds

Max. Bending Capacity: 620N/mm² (63kgf/mm²) Max. D32

Weight: 25.5kg

Dimensions: 670mm (L) x 302mm (W) x 219mm (H)

Standard Accessories: Wooden Box, Hydraulic oil #46,
Hex wrenches (3. 4. 5. 6. 8),
Spanner (14 x 17mm & 24mm),
Roller



HRB-32 钢筋弯曲机

产品参数

PRODUCT SPECIFICATION

电 压	220V/50HZ	功 率	1600W
弯曲速度	4-5秒	弯曲范围	16-32mm
证 书	CE ROHS	外形尺寸	640x190x230mm
净 重	23.6kg	包装尺寸	720x300x290mm
毛 重	33kg	包装方式	内铁箱/外7层瓦楞纸箱



RC-32 钢筋切断机

产品参数		PRODUCT SPECIFICATION	
电 压	220V/50HZ	功 率	1700W
切断速度	4-5秒	切断范围	4-32mm
证 书	CE ROHS	外形尺寸	605x180x280mm
净 重	29kg	包装尺寸	690x260x345mm
毛 重	38kg	包装方式	内铁箱/外7层瓦楞纸箱